


PCI-1202LU/PCI-1202HU

Universal PCI, 32-channel, 12-bit, 110 or 44 kS/s
Multifunction Board (1 K word FIFO)

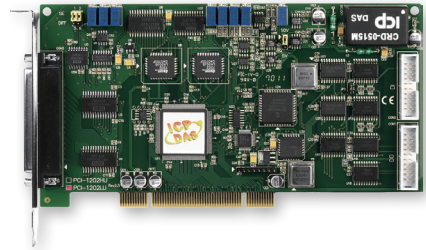

Features

- Universal PCI (3.3 V/5 V) Interface
- Supports Card ID (SMD Switch)
- 2-channel, 16-bit Analog Output
- 16-channel 5 V/TTL Digital Output
- 16-channel 5 V/TTL Digital Input
 - Pull-high and Pull-low Resistors for DI Channels
- 32 Single-ended/16 Differential Analog Input Channels
 - 12-bit, 110 kS/s or 44 kS/s AD Converter
 - Built-in MagicScan Controller
 - Internal Trigger: Software-trigger, Pacer-trigger
 - External Trigger: Post-trigger, Pre-trigger, Middle-trigger
- High-speed data transfer rate up to 2.1 M words/sec.

Introduction

The PCI-1202 series is a family of high performance data acquisition boards that feature continuous gap-free data acquisition in DOS at 110 kHz for low gain or 44 kHz for high gain. The PCI-1202 family has the same hardware architecture as the PCI-1802, and provides 32-channel single-ended or 16-channel differential Analog Inputs. As with the PCI-1802 family, the PCI-1202 series features both the Magic Scan and Continuous Capture functions.

The PCI-1202LU/HU Universal PCI card supports both the 3.3 V and the 5 V PCI bus. The PCI-1202LU/HU cards are fully compatible with PCI-1202L/H cards and are designed as direct replacements without requiring any modification to the software or the driver, with the main difference being the addition of DI pull-high/low resistors and a Card ID switch on the PCI-1202LU/HU.

The PCI-1202LU/8K and PCI-1202HU/8K cards are equipped with an 8K-sample hardware FIFO that reduces data overflow issues in multi-tasking environments such as Windows and Linux.

Pin Assignments

Pin Assignment	Terminal No.	Pin Assignment	Pin Assignment	Terminal No.	Pin Assignment
AI_0	01	20	AI_16	DO 0	01
AI_1	02	21	AI_17	DO 2	03
AI_2	03	22	AI_18	DO 4	05
AI_3	04	23	AI_19	DO 6	07
AI_4	05	24	AI_20	DO 8	09
AI_5	06	25	AI_21	DO 10	10
AI_6	07	26	AI_22	DO 12	12
AI_7	08	27	AI_23	DO 14	14
AI_8	09	28	AI_24	GND	16
AI_9	10	29	AI_25	+5 V	18
AI_10	11	30	AI_26	CON1	
AI_11	12	31	AI_27	DI 0	01
AI_12	13	32	AI_28	DI 2	03
AI_13	14	33	AI_29	DI 4	05
AI_14	15	34	AI_30	DI 6	07
AI_15	16	35	AI_31	DI 8	09
A.GND	17	36	Da2 out	DI 10	11
Da1 out	18	37	D.GND	DI 12	13
Ext_Trg	19			DI 14	15
				GND	17
				+5 V	19
				CON2	

Software

Drivers

- 32/64-bit Windows XP/2003/2008/Vista/7/8
- Linux DASyLab

Sample Programs

- DOS Lib and TC/BC/MSC Demo LabVIEW Toolkit
- VB/VC/Delphi/BCB/VB.NET/C#.NET/VC.NET/MATLAB Demo

Hardware Specifications

Model	PCI-1202LU	PCI-1202HU
Analog Input		
Channels	32 Single-ended/16 Differential	
AD Conversion	12-bit, 8.5 µs Conversion Time	
Accuracy	0.1% of FSR ±1 LSB @ 25 °C, ±10 V	
FIFO Size	1024 Samples	
Sampling Rate	110 kS/s	44 kS/s
Analog Output		
Channels	2	
Resolution	12-bit	
Accuracy	0.06% of FSR ±1 LSB @ 25°C, ±10 V	
Output Driving	±5 mA	
Output Range	±5 V, ±10 V	
Digital I/O		
Channels	DI	16, 5 V/TTL
	DO	16, 5 V/TTL
Input Voltage	Logic 0: 0.8 V Max.; Logic 1: 2.0 V Min.	
Output Voltage	Logic 0: 0.4 V Max.; Logic 1: 2.4 V Min.	
Output Capability	Sink: 2.4 mA @ 0.8 V; Source: 0.8 mA @ 2.0 V	
Timer/Counter		
Channels	3	
Resolution	16-bit	
Input Frequency	10 MHz Max.	
Reference Clock	Internal: 8 MHz	
General		
Bus Type	3.3 V/5 V Universal PCI, 32-bit, 33 MHz	
Card ID	Yes (4-bit)	
Connectors	Female DB37 x 1, 20-pin Box Header x 2	
Power Consumption	300 mA @ +5 V	
Operating Temperature	0°C to +60°C	
Humidity	5 to 85% RH, Non-condensing	

Ordering Information

PCI-1202LU CR	Universal PCI, 32-channel 12-bit, 110 kS/s Low Gain, Multifunction DAQ Board (1 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.	PCI-1202LU/8K CR	Universal PCI, 32-channel 12-bit, 110 kS/s Low Gain, Multifunction DAQ Board (8 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.
PCI-1202HU CR	Universal PCI, 32-channel 12-bit, 44 kS/s High Gain, Multifunction DAQ Board (1 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.	PCI-1202HU/8K CR	Universal PCI, 32-channel 12-bit, 44 kS/s High Gain, Multifunction DAQ Board (8 K word FIFO) (RoHS). Includes one CA-4002 D-sub connector.

3
2
PCI Bus Data Acquisition Boards